

## Firmware V1.10 Update Procedure

### NOTE:


This firmware update will add the following features to your SnapLab model UP-CR10L

- ✓ “Print All Split Images”
- ✓ “Job Ticket Printing” (Receipt Printer)
- ✓ “Maximum Quantity Per Print” setting
- ✓ Change in Languages:

Deleted Italian/German and added Simplified Chinese/Korean

### USB 2.0 Connection

- 1 Connect the UP-CR10L via USB to a PC or Laptop as shown.

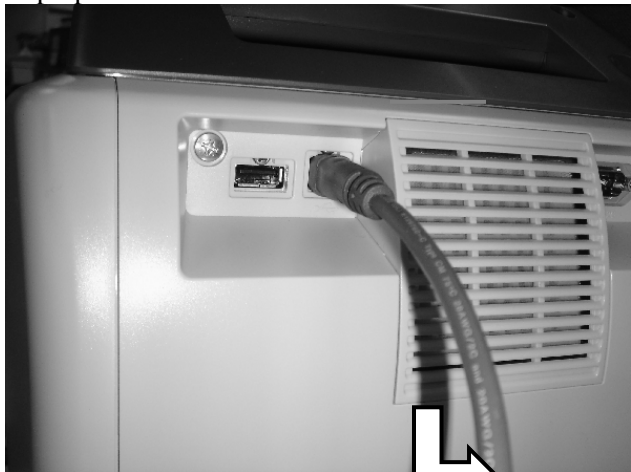


- 2 First power up the UP-CR10L then power up the attached PC or Laptop.

- ❖ Note that a **Found New Hardware Wizard** message may appear. Select **No**, **not this time** and click **Next>** to continue.




### Firmware Update

- 1 Locate and double click the firmware file.




- 2 The file will extract.

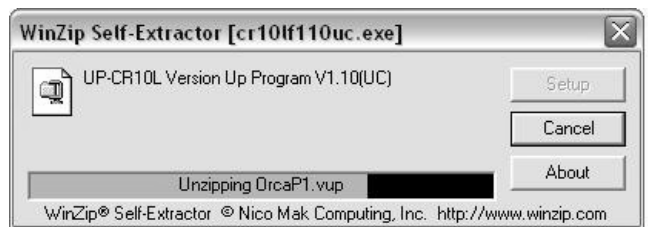

- 3 Select **Yes** to accept the terms of the license agreement and click **Ok** to continue.
- 4 The following dialog box will appear as the printer firmware is updated.

❖ **Do not handle or disturb the printer during the update process.**

## Firmware V1.10 Update Procedure Continued

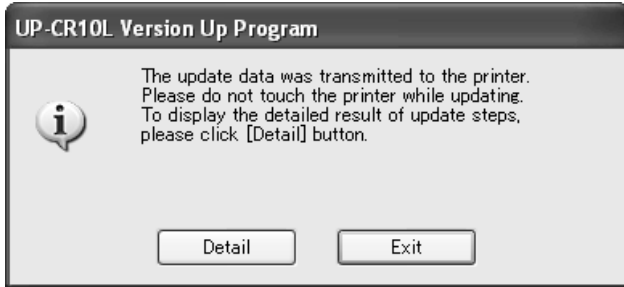


- ❖ During the update process, the UP-CR10L display will flicker for several minutes, go blank then restart.

- 5 Once complete, click **Exit**.
- 6 The USB cable can now be disconnected.


## Feature Testing

### “Print All” Split Image Test Print


- 1 Double tap top left of screen to generate password keypad display.
- 2 At the password screen, type **775482**  
TIP: Telephone Number Pad **SPLITA**.
- ❖ Note the unit will beep when entering the last two numbers.
- 3 The following screen will now appear.

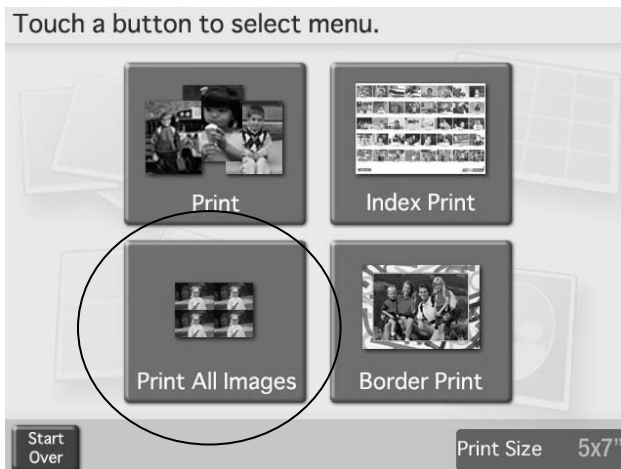

- 5 The system will load all images stored in the SnapLab and on the memory card

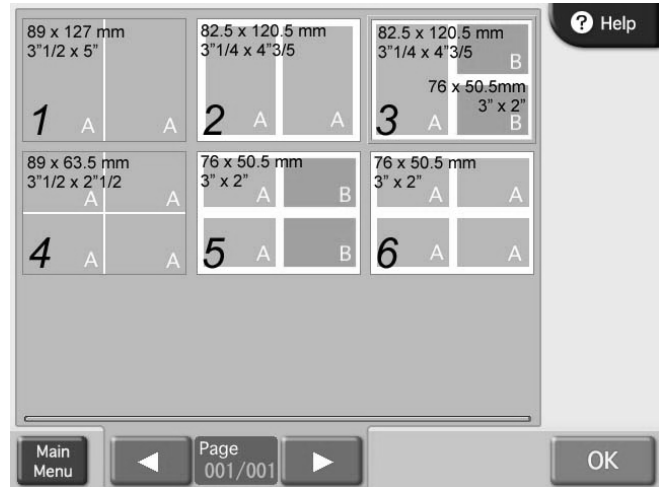

- 6 Confirm your order, and then press “Start Print”.

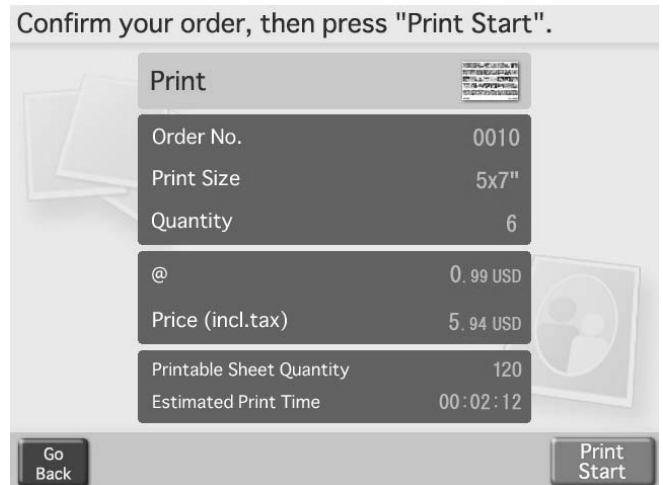


### Job Ticket Printing

- ❖ Refer to the *Connection Manual to Job Ticket Printer* for details.


---


## Maximum Quantity Per Print

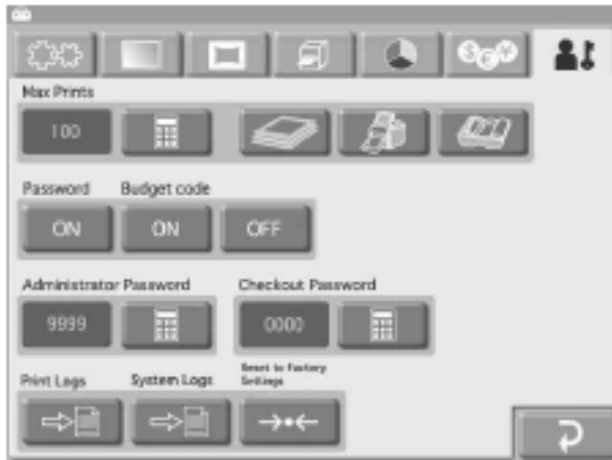

For details on setting the maximum number of prints that can be handled, ignore the section on “Max Prints Per Order” in the Operating Instructions and refer to the following instead.




### Administration Tab

Max Prints sets the Maximum Number of Prints that can be handled. First select a Max Prints mode (Order, Rental, Ink Ribbon) button. Next, touch the **Keypad Button**  and enter the Maximum Number of Prints using the numeric keypad that appears on the screen. Touch the **OK** button to confirm.

**Order Button**  Sets the maximum number of points that can be handled by the unit. You can set the maximum number of points per order to any value from **1 to 500**. The maximum number of prints per order remains in effect even when the other modes are selected.

**Rental Button**  Sets the maximum number of points that can be handled by the unit. This mode is suitable for use when renting out the unit, as printing beyond the maximum number set is not possible. You can set the maximum number of prints to any value from **1 to 9999**. To clear the print total, touch the **Keypad Button**  and reset the maximum number of prints.

**Ink Ribbon Button**  Determines the maximum number of prints based on the remaining ink on the ribbon cartridge at the time of printing. You cannot set a maximum number of prints when this button is selected. The maximum number of prints for a single image is 99 prints.

### ❖ Note

- ✓ The Maximum Number of Prints per order remains in effect even when the other modes are selected.
- ✓ When the Rental Mode is selected, the remaining number of prints available is displayed. When this display reaches “)”, printing is not possible until the Maximum Number is reset.